


CONNEX cPot medical cable terminated with right-angled POAG sockets according to DIN 42801

Protection class: IP20
 Max. current: 32A
 operating temperatur: -25°C bis +125°C

High flexible connection cables with green-yellow insulation for equipotential bonding

According to IEC 60364-7-710, an additional protective equipotential bonding must be established in every medical area of groups 1 and 2

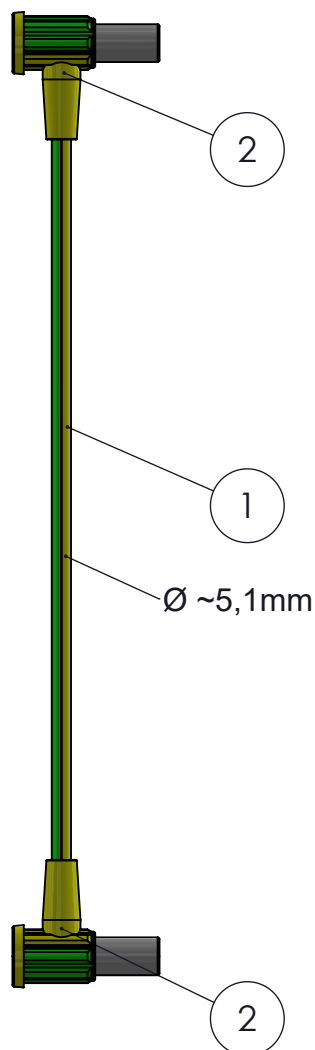

Description	Order-Code	Length	Weight
CP-M6FF-0005	1027389	0,5 m	-
CP-M6FF-001	1027390	1 m	0,12 kg
CP-M6FF-002	1027391	2 m	-
CP-M6FF-003	1027392	3 m	0,25 kg
CP-M6FF-004	1027393	4 m	-
CP-M6FF-005	1027394	5 m	0,39kg

No.	Part	Qty.
1	CP-MS6	1
2	POAG-KBT6-EC/6	2

Sheet Number 1/1	Projection 	Scale 1:2	Format A4	Tolerancing ISO 2768-	
g	cm ²	cm ³	Created	HeBo	08.06.2021
Material			Modified		
Material addition			Approved	DiRo	08.06.2021
Description CP-M6FF cPot med patchcords to connect to med power TURTLE			ECN Number		
			Status	FOR FINAL	
		3D Model ID	Document ID	Revision	01